


## 不锈钢止回阀 /Stainless steel check valve(SS 316L)



### 订购码 /Ordering code

SS	-	CV	-	01																
<table border="1"> <tr> <td>材质 /Material</td> <td>不锈钢 316L/SS 316L</td> </tr> </table>		材质 /Material	不锈钢 316L/SS 316L	<table border="1"> <tr> <td>接口 /Port size</td> <td></td> </tr> <tr> <td>01</td> <td>G1/8"</td> </tr> <tr> <td>02</td> <td>G1/4"</td> </tr> <tr> <td>03</td> <td>G3/8"</td> </tr> <tr> <td>04</td> <td>G1/2"</td> </tr> <tr> <td>06</td> <td>G3/4"</td> </tr> <tr> <td>1寸</td> <td>G1"</td> </tr> </table>			接口 /Port size		01	G1/8"	02	G1/4"	03	G3/8"	04	G1/2"	06	G3/4"	1寸	G1"
材质 /Material	不锈钢 316L/SS 316L																			
接口 /Port size																				
01	G1/8"																			
02	G1/4"																			
03	G3/8"																			
04	G1/2"																			
06	G3/4"																			
1寸	G1"																			

### 尺寸图片 /Dimension

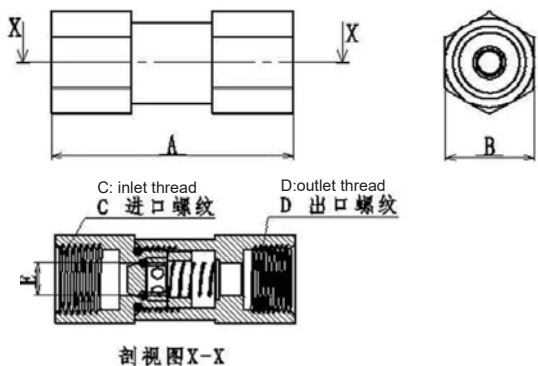

### 产品参数 /Specification

品名 /product name	不锈钢单向阀 /Stainless steel check valve
材质 /material	SUS 316 不锈钢 /SS 316
工作压力 /working pressure	1~40bar
工作温度 /working temperature	-10~100°C
安装方式 /installation	水平 horizontal 竖直 vertical
适用介质 /medium	气体 gas 液体 liquid

螺纹规格 /port size	流量通径 /flow diameter	阀体长度 (A)/length of valve body	六角对边 (B)/hexagon edge	重量 (克) /weight(g)
1分 G1/8	5	45	17	62
2分 G1/4	6.5	57	19	88
3分 G3/8	7.5	60	22	120
4分 G1/2	11	71	27	205
6分 G3/4	14	80	32	305
1寸 G1"	19	90	38	410